



SPECIFICATION FOR APPROVAL

Part name: Din-Rail Terminal Block

Part No.: RTB404-11-01

Cust. P/N:

Date: 2010-02-08

Seller Confirmation

Written by	Zhujiwei
Checked by	SJ.Fu
Approved by	Bill

Customer Confirmation

Project Audit	
Structure Audit	
Security Certification	
Quality Approval	

Supplier : Hangzhou antron electronics Co., Ltd.

Address : No.639 , Deng yun Road , Hangzhou China

Tel : 0571-89902210

Fax : 0571-89908128

Postcode: 310011

E-mail : anqiao@263.net

Customer:

Customer P/N:


Seller: Hangzhou antron electronics Co., Ltd.

Part No: RTB404-11-01


Revision for RTB404-11-01

Item No	Edition	Part Revised	Date Revised
1	A	put in file	2010-02-08
2			
3			
4			
5			
6			
7			
8			
9			

1.TYPE: RTB404-11-01

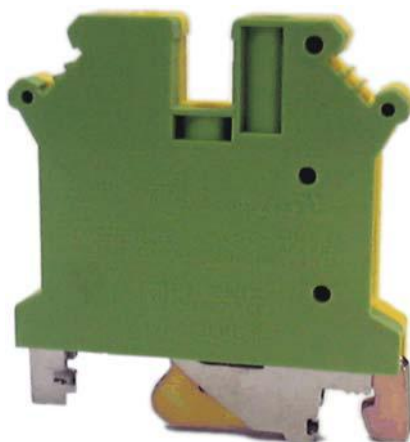

2.DRAWING&SIZES

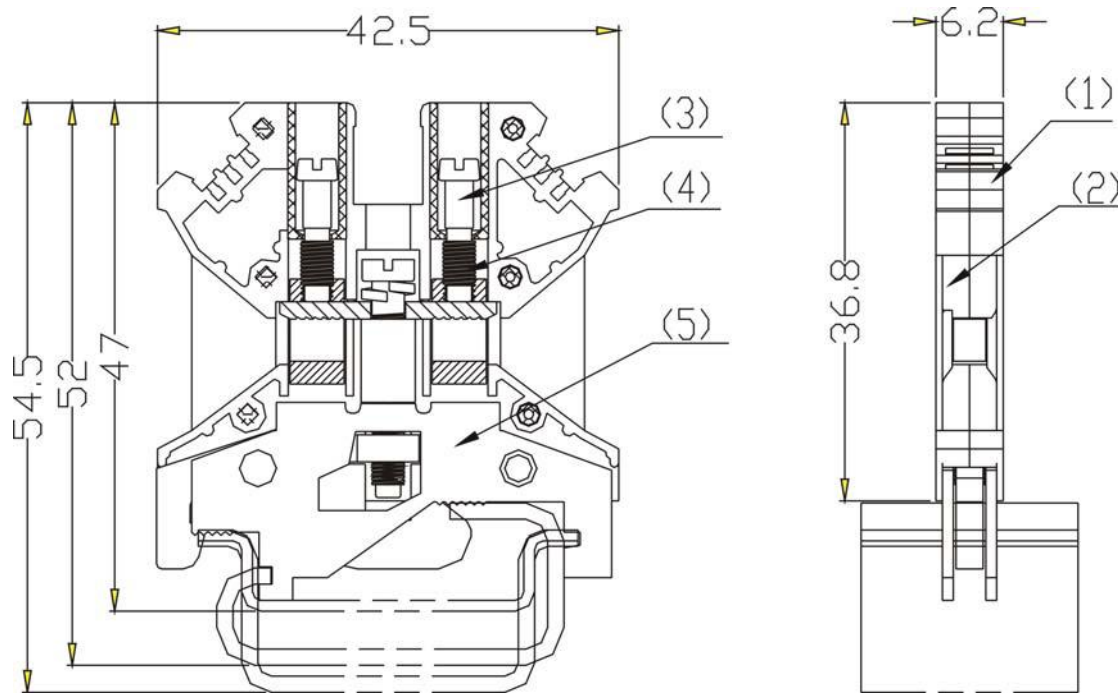

OVERALL SIZES

TOLERANCE:

> 120	± 0.80
> 30 ~ 120	± 0.50
> 6 ~ 30	± 0.40
0 ~ 6	± 0.25

3.BOM TABLE

ITEM.	PART NAME	MATERIAL	SURFACE OF CONTACT	QUANTIT Y(PCS)
(1)	Body-yellow	PA66 UL94		1
(2)	Body- green	PA66 UL94	Nickel Plated 5um	1
(3)	Screw	BRASS H59	Nickel Plated 5um	2
(4)	Block	BRASS H59	Nickel Plated 5um	2
(5)	Metal assy	BRASS H59	Nickel Plated 5um	1

4. TECHNICAL DATA:

WIRE RANGE:	10~26AWG
MAX. TORQUE:	5.3 lbf.in
BREAKDOWN VOLTAGE:	8000V (1.2/50μs)
CROSS SECTION:	6mm²
STRIPPING LENGTH:	9mm

5. WORKING CONDITION:

OPERATING TEMPERATURE:	-40℃~+105℃
ALTITUDE:	Less than 2000m 40Kpa~80KPa
RELATIVE HUMIDITY:	5%~95%
POLLUTION DEGREE:	III

6. APPLICABLE STANDARDS

IEC 60947-1:2001 IEC 60947-7-1:2002 UL 1059:2001

7. ACCESSORIES

MOUNTING RAIL:	JNS35:7.5/JNS35:15/JNS32
MARKING STRIP:	A061-10-5
Rail stator:	GD001 or A047-9

8. PROCEDURE

Wires can be connected with this type of terminal blocks by a manual or automatic screwdriver.

9. PACKAGE

Tightly Sealed

Antimon