

Material:

△ * Insulator: LCP With 35% GF/mineral.
UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CB01 ** * D 1 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Contact: 04 to 50


- △ ③ Plating code:
2= Gold flash plated over 1.27μm(50μ") Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

- ④ Tail Style: D = DIP Type
- ⑤ Insulator Color: 1 = Black
- ⑥ Other option:

DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.67

* Available in 4 through 50 Circuits

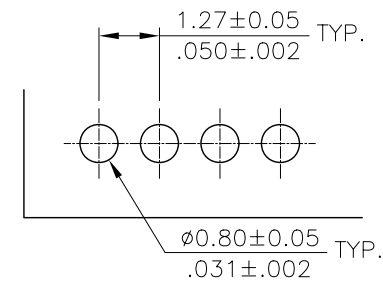

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: PITCH 1.27mm(.050") DIP TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation	
③			DRAWN BY: Sandy		4/30-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
②	Sandy	4/30-07'	ECN07156/ECR07018-1		ENGINEER: Eisley	5/2-07'	.X ± 0.25/.010	X' ± 1"	MATERIAL:	
①	SUN	10/15/04	ECR04056-1/ECN04394		CHECKED BY: David	5/2-07'	.XX ± 0.15/.006	.X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	5/2-07'	.XXX ± 0.08/.003	.XX' ±		DRAWING NO. CB0101SC	PART NO. CB01***D100
									SCALE 6 / 1	SHEET 1 OF 1