Material:

△2 * Insulator: LCP With 35% GF/mineral. UL 94V-0 Color Black

* Contact: Phosphor Bronze

△3 * Pick & Place Pad: Nylon 6T With 30% GF. UL 94V-0 Color Nature

Ordering Code:

CB01 ** * M 1 00 - 2 P

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Contact: 04 to 50

③ Plating code:
- 2= Gold flash plated over 1.27μm(50μ") Nickel
- 3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
- 4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

④ Tail Style: M = SMT Type

⑤ Insulator Color: 1 = Black

⑥ Other option:

⑦ Pin Size for mate Pin header: 2=0.4 Square Pin

⑧ 0=Without Pick & Place Pad
P=With Pick & Place Pad

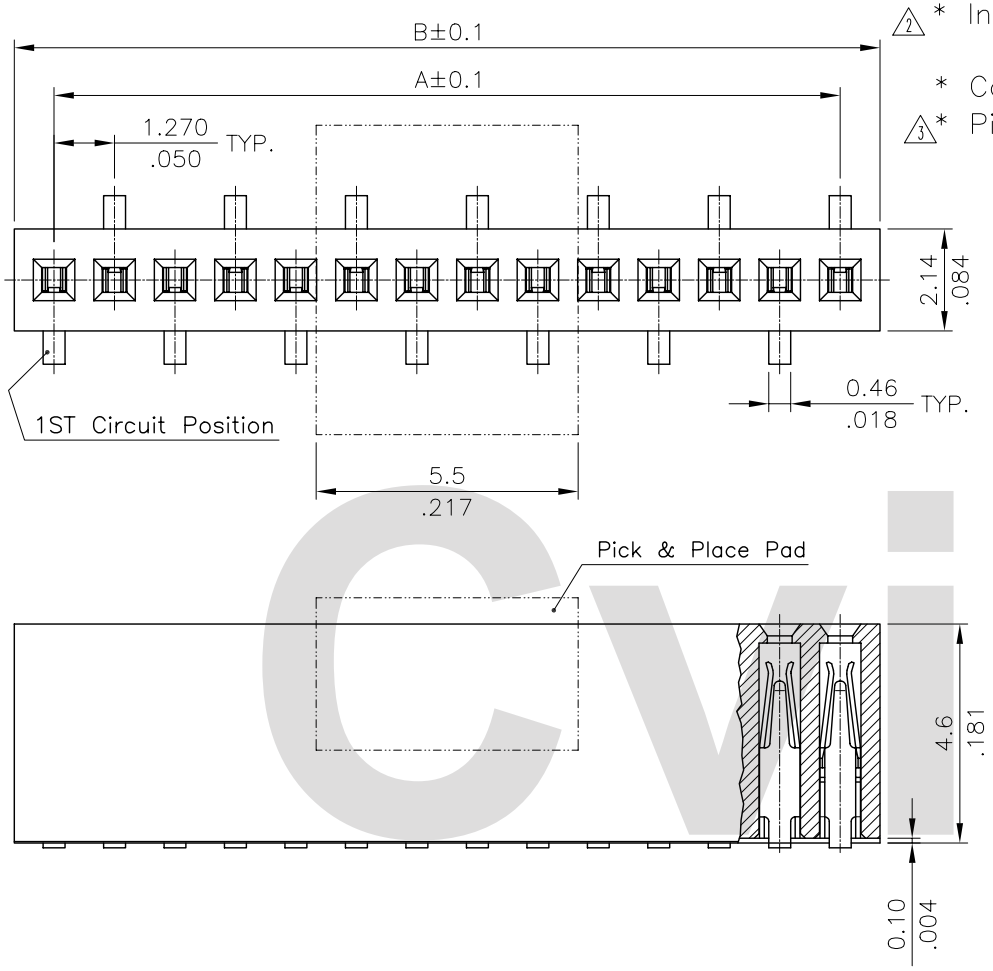

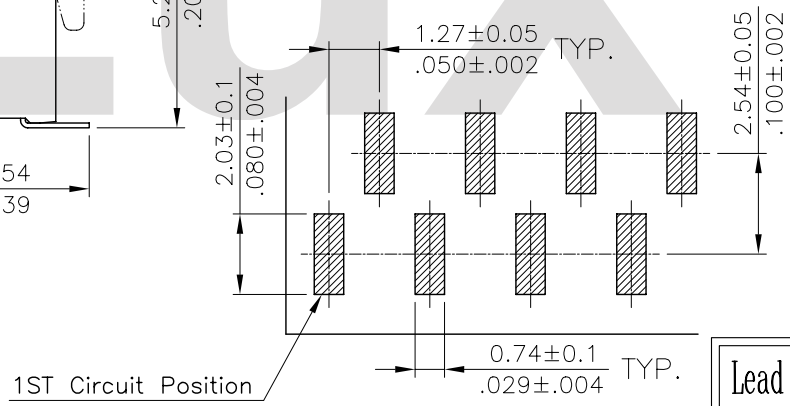

DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.67

* Available in 4 through 50 Circuits

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3	Sandy	2/19-09'	ECN09066/ECR08097-0
2	Sandy	4/30-07'	ECN07156/ECR07018-1
1	SUN	10/15/04'	ECR04056-1-ECN04394

CVILUX CORP 2009.03.03 ISSUED

		DATE
DRAWN BY:	Sandy	2/25-09'
ENGINEER:	Eisley	3/02-09'
CHECKED BY:	Eisley	3/02-09'
APPROVED BY:	Alex	3/02-09'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.25/.010	X.° ± 1°
.XX ± 0.15/.006	.X° ±
.XXX ± 0.08/.003	.XX° ±

TITLE: PITCH 1.27mm(.050") SMT TYPE SOCKET

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CB0102SD	PART NO.	CB01***M100-2*
SCALE	6 / 1	SHEET 1 OF 1	