

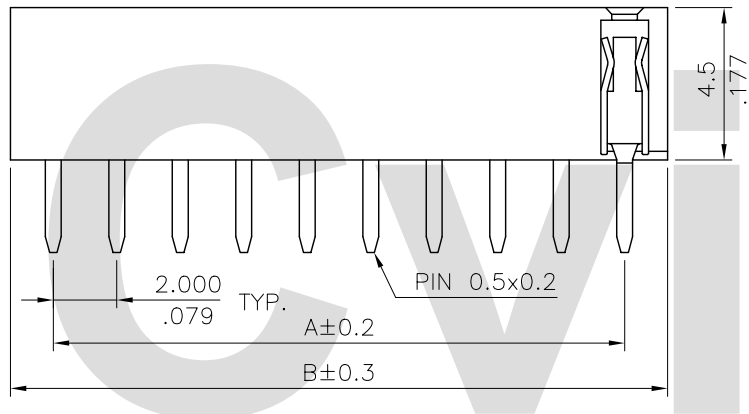


Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

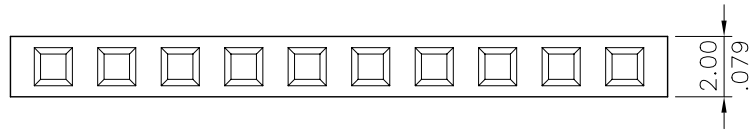

Ordering Code:


CB22 ** 2 V 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:
2= Gold flash plated over
1.27 μ m(50 μ) Nickel
- ④ Tail Style: V= Straight
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard

A = 2.00 * No. of Spaces

B = A + 2.60

* Available in 2 through 40 circuits



Recommended P.C. Board Layout



RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") SINGLE ROW BOARD MOUNT CONNECTOR	瀚荃股份有限公司 CviLux Corporation			
③				DRAWN BY: Cynn	12/29 04'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
②	LYNN	12/29-04	ECN04518	ENGINEER: Eisle	12/31 04'	.X ± 0.30 / .012 .X' ± 1"	FINISH:	SCALE	4 / 1	SHEET	1 OF 1
①	SUN	11/4/04'	ECN04436	CHECKED BY: Alex	12/31 04'	.XX ± 0.20 / .008 .X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	12/31 04'	.XXX ± 0.10 / .004 .XX' ±					