
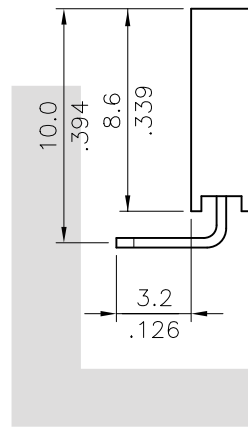


Material:
 ⚠️ ⚠️ * Insulation: PBT With 15% G.F. UL 94V-0
 * Contact: Brass

Ordering Code:


CB39 ** 2 H 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:
2= Gold flash plated over 1.27μm(50μ") Nickel
- ④ Tail Style: H= Right angle
- ⑤ Color: 1= Black
- ⑥ Other options: 00= Standard

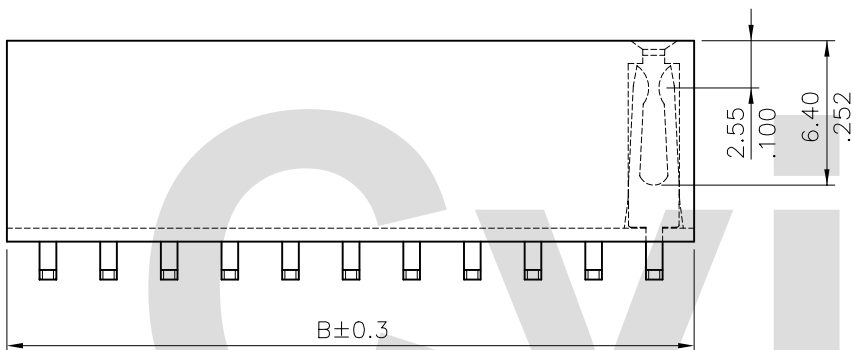

⚠️	DIM.A TOLERANCE	
	2P~19P	±0.20
	20P~40P	±0.35

A = 2.54 * No. of Spaces
 B = A + 3.0
 * Available in 2 through 40 circuits

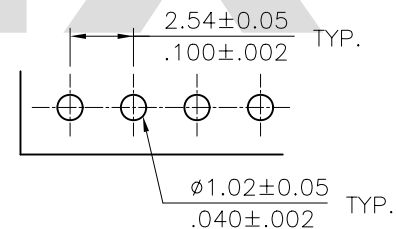

Recommended P.C. Board Layout

RoHS Compliant

④	Sun	1/22-07'	ECN07036			DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") SINGLE ROW BOARD MOUNT CONNECTOR	瀚荃股份有限公司 CviLux Corporation	
③	Jim	8/04-06'	ECN06271		DRAWN BY: Sun	1/22-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		DRAWING NO. CB3902SL PART NO. CB39**2H100
②	HANK	4/24-06'	ECN06141/ECR0634-0		ENGINEER: Eisley	1/22-07'	.X ± 0.30/.012 X: ± 1"	FINISH:		SCALE 3 / 1 SHEET 1 OF 1
①	Sun	6/01-05'	ECR05051-0/ECN05196		CHECKED BY: David	1/22-07'	.XX ± 0.20/.008 X: ±			
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	1/22-07'	.XXX ± 0.10/.004 XX: ±			