

A = 2.00 * No. of Spaces

B = A + 2.50

* Available in 4 through 50 circuits

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CB78 ** 2 H 1 00
 ① ② ③ ④ ⑤ ⑥

① Series No.

② NO. of Circuits:


③ Plating code:

2= Gold flash plated over
 1.27µm(50µ") Nickel

④ Tail Style: H= Right angle

⑤ Color: 1= Black

⑥ Options: 00= Standard

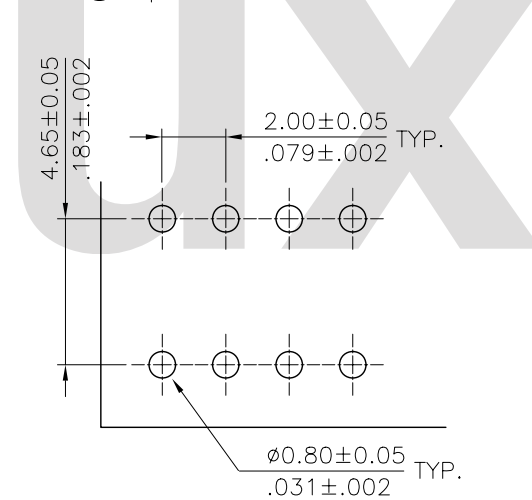

Recommended P.C. Board Layout

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") DUAL ROW SIDE ENTRY BOARD MOUNT CONNECTOR	瀚荃股份有限公司 CviLux Corporation
3				DRAWN BY: Rita	11/22 01'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2				ENGINEER: David	11/28 01'	.X ± 0.30/.012 X: ± 1*	FINISH:	
1				CHECKED BY: David	11/28 01'	.XX ± 0.20/.008 .X: ±		DRAWING NO. CB7801SC
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/28 01'	.XXX ± 0.10/.004 .XX: ±	SCALE 4 / 1	SHEET 1 OF 1