

Material:


△ △ \* Insulation: PBT With 15% G.F.  
UL 94V-0

\* Contact: Brass

Ordering Code:

CB91 \*\* 2 H 1 00  
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits:  
2 = Gold flash plated over 1.27μm(50μ") Nickel
- ③ Plating code:
- ④ Tail Style: H= Right angle
- ⑤ Color: 1= Black
- ⑥ Other options: 00= Standard

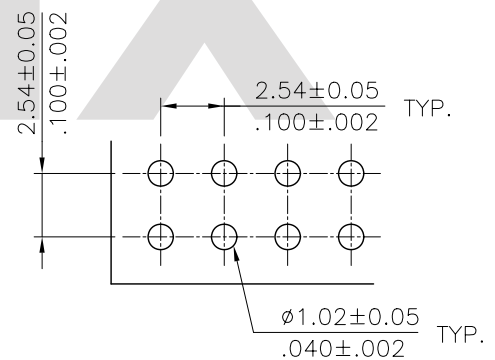

A = 2.54 \* No. of Spaces  
B = A + 3.0  
\* Available in 4 through 80 circuits

△	DIM.A TOLERANCE	
	4P~38P	±0.20
	40P~80P	±0.35

Recommended P.C. Board Layout

RoHS Compliant

△4						DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW BOARD MOUNT CONNECTOR	瀚荃股份有限公司 CviLux Corporation
△3	Sun	1/22-07'	ECN07036	2007.01.24	DRAWN BY: Sun	1/22-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
△2	HANK	4/24-06'	ECN06141/ECR0634-0	ISSUED	ENGINEER: Eisley	1/22-07'	.X ± 0.30/.012 X.* ± 1*	FINISH:	DRAWING NO. CB9102SI PART NO. CB91**2H100
△1	Sun	6/01-05'	ECR05051-0/ECN05196		CHECKED BY: David	1/22-07'	.XX ± 0.20/.008 .X.* ±		SCALE 3 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	1/22-07'	.XXX ± 0.10/.004 .XX.* ±		