
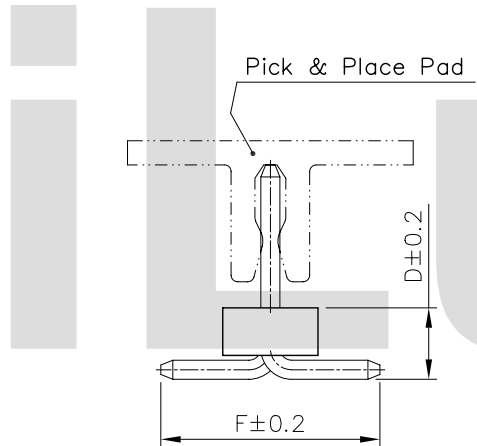


Recommended P.C. Board Layout

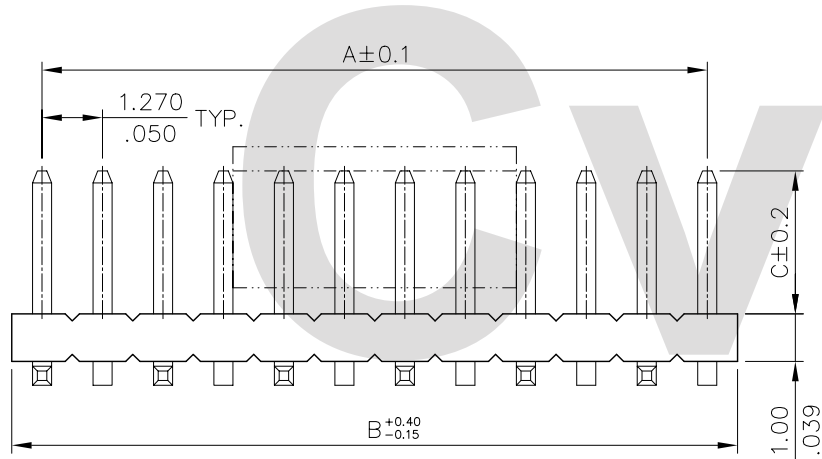

DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.27

* Available in 4 through 50 Circuits

Notes:

* Material:

Insulator: LCP With 30% GF.

UL 94V-0 Color Black

Square Pin: Brass

Pick & Place Pad:

Nylon 6T UL 94V-0, Color Nature

△* Pin overall Length 20.0mm Max.

Ordering Code:

CH01 ** * M 1 ** - 0 *

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Contact: 04 to 50

③ Plating code:

2=Gold Flash plated over

1.27 μm(50 μ") Nickel

3=0.38 μm(15 μ") Gold plated

over 1.27 μm(50 μ") Nickel

4=0.76 μm(30 μ") Gold plated

over 1.27 μm(50 μ") Nickel

④ Tail & Mounting Style:

M=Straight SMT Type

⑤ Insulator Material & Color:

1=LCP, Color Black

⑥ Option Code:

See Table PDF. File No. CH0102T

⑦ Pin Size: 0=Original design

⑧ 0= Without Pick & Place Pad

(Tube packaged)

P= With Pick & Place Pad

(Tape & Reel packing)



Lead Free Process RoHS compliant

4					DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") SINGLE ROW SURFACE BOARD MOUNT PIN HEADER
3				DRAWN BY: Sun	10/6-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:
2	Sun	10/2-08'	ECN08477/ECR08117-1	ENGINEER: Eisley	10/07-08'	.X ± 0.25/.010 .X' ± 1'	FINISH:
1	Sun	5/07/04'	ECN04183	CHECKED BY: Alex	10/07-08'	.XX ± 0.15/.006 .X' ±	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/07-08'	.XXX ± 0.08/.003 .XX' ±	
DRAWING NO. CH0102SD PART NO. CH01***M1**-0*							
SCALE 6 / 1 SHEET 1 OF 1							

