

Notes:



* Material:

Insulator: Nylon 6T With 30% GF.

UL 94V-0 Color Black

Square Pin: Brass

△* Pin overall Length 20.0mm Max.

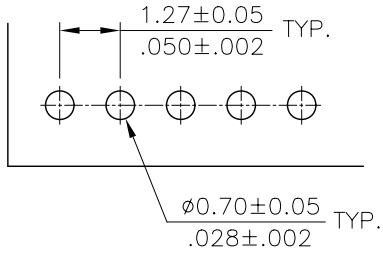



Ordering Code:

CH02 ** * V 1 **

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Contact: 04 to 50
- ③ Plating code:
2=Gold Flash plated over 1.27μm(50μ") Nickel
3=0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4=0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail & Mounting Style:
V=Straight DIP Type
- ⑤ Insulator Material & Color:
1=Nylon 6T , Color Black
- ⑥ Option Code:
See Table PDF. File No. CH0201T


Recommended P.C. Boarded Layout

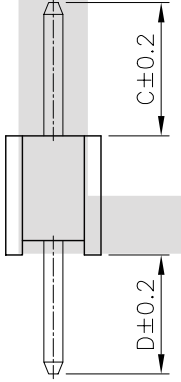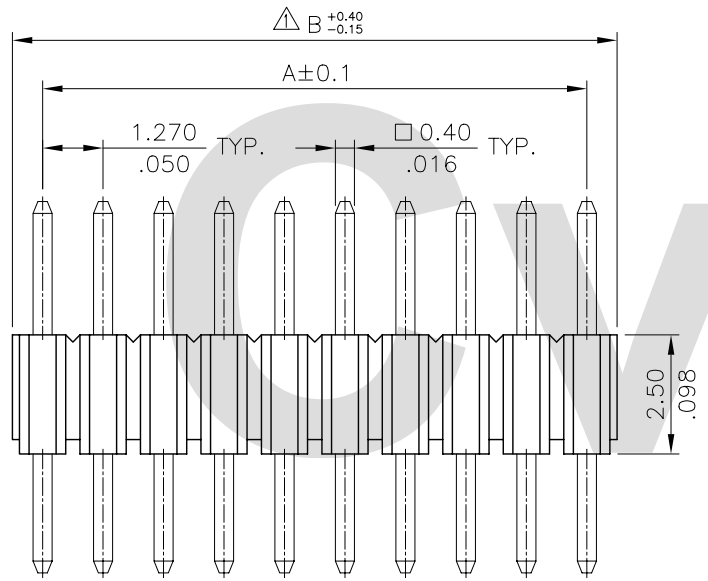

DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.27
 * Available in 4 through 50 Circuits

Lead Free Process
 RoHS Compliant

CVILUX.XORP
 2008.10.14
 ISSUED

4						DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") SINGLE ROW BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation	
3	Sun	10/6-08'	ECN08477/ECR08117-1	DRAWN BY: Sun	10/6-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	DRAWING NO. CH0201SD		PART NO. CH02***V1**
2	Sandy	3/20-08'	ECN08141/ECR08030-1	ENGINEER: Easley	10/07-08'	.X ± 0.25?010 X' ± 1"	FINISH:	SCALE 6 / 1		SHEET 1 OF 1
1	Sandy	08/30/04'	ECN04327	CHECKED BY: Alex	10/07-08'	.XX ± 0.15?006 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/07-08'	.XXX ± 0.08?003 .XX' ±				