



Notes:

1. DIM. E = 5.0 min.
2. Pin overall length 20.0 max.
3. Material:
 - * Insulator: Nylon 6T With 30% GF. UL 94V-0 Color Black
 - * Square Pin: Brass

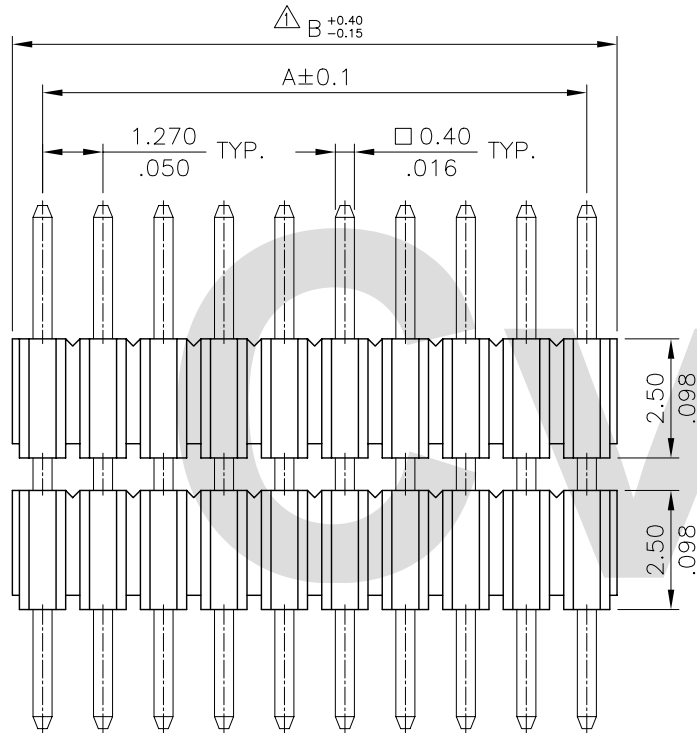

Recommended P.C. Boarded Layout

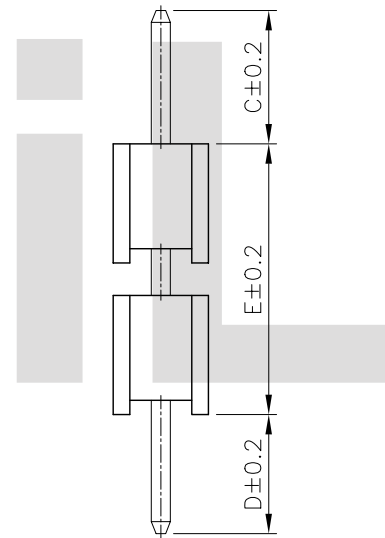

Ordering Code:


CH03 ** * V 1 **
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Contact: 04 to 50
- ③ Plating code:
 - 2=Gold Flash plated over 1.27μm(50μ") Nickel
 - 3=0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 - 4=0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail & Mounting Style: V=Straight DIP Type
- ⑤ Insulator Material & Color: 1=Nylon 6T , Color Black
- ⑥ Option Code: See Table PDF. File No. CH0301T

DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.27
 * Available in 4 through 50 Circuits

CVILUX.CORP
 2004.08.31
 ISSUED

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") SINGLE ROW DUAL BODY BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation	
3				DRAWN BY: Sandy	8/27/04'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
2				ENGINEER: Eisley	8/30/04'	.X ± 0.25/.010 X* ± 1'	FINISH:	DRAWING NO. CH0301SB	
1	Sandy	08/27/04'	ECN04327	CHECKED BY: David	8/30/04'	.XX ± 0.15/.006 X* ±		DRAWING NO. CH0301SB	PART NO. CH03***V1**
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	8/30/04'	.XXX ± 0.08/.003 .XX ±		SCALE 6 / 1	SHEET 1 OF 1