


Notes:




- * Material:
Contact: Brass
- △ * Pin overall Length 30.0mm Max.



Ordering Code

CH11 ** * V * **
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Plating Code:
 - 1= 3.05 μm(120 μ") Min. Tin
over 0.76 μm(30 μ") Nickel
 - 2= Gold flash plated
over 1.27 μm(50 μ") Nickel
 - 3= 0.38 μm(15 μ") Gold plated over
1.27 μm(50 μ") Nickel
 - 4= 0.76 μm(30 μ") Gold plated over
1.27 μm(50 μ") Nickel
- ④ V= Straight
- △ ⑤ Insulation: 1= PBT UL 94V-0, Color Black
A= Nylon 6T UL 94V-0, Color Black
- ⑥ Pin Length Option cord:
See Table PDF. File No. CH1101T

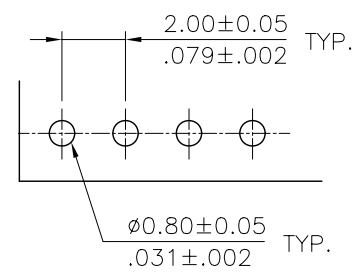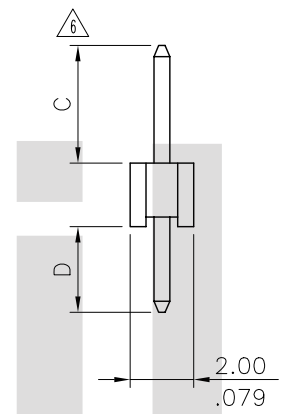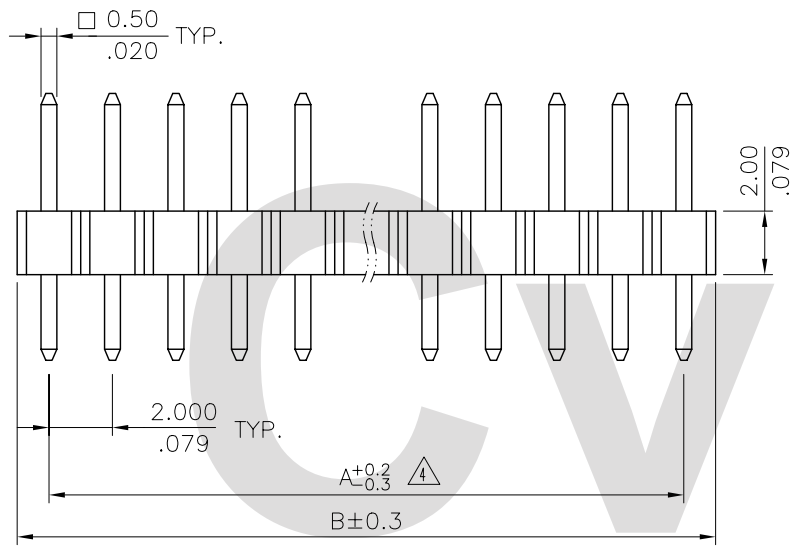

A = 2.00 * No. of Spaces
 B = A + 2.00
 * Available in 2 through 40 circuits

Recommended P.C. Board Layout

RoHS Compliant

△6	Karen	12/09-09'	ECN09583				DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") STRAIGHT				
△5	Sun	10/6-08'	ECN08478/ECR08118-1		DRAWN BY:	Karen	12/09-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED	X' ± I'	SINGLE ROW BORAD MOUNT PIN HEADER			
△4	Sandy	1/31-08'	ECN08055/ECR08011-1		ENGINEER:	Eisley	12/10-09'			.X ± 0.30 / .012	X' ± I'	MATERIAL:	
△3	Jim	3/13/06'	ECN06084		CHECKED BY:	Eisley	12/10-09'	.XX ± 0.20 / .008	.X' ±	FINISH:			
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Alex	12/10-09'	.XXX ± 0.10 / .004	.XX' ±				
										DRAWING NO.	CH1101SI	PART NO.	CH11***V***
										SCALE	4 / 1	SHEET	1 OF 1

