

Notes:

* Material:

Contact: Brass

△ * Pin overall Length 30.0mm Max.

Ordering Code

CH34 ** * V * **
 ① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Plating Code:

1 = $3.05 \mu\text{m}$ ($120 \mu\text{m}$) Min. Tin
 over $0.76 \mu\text{m}$ ($30 \mu\text{m}$) Nickel

2 = Gold flash plated
 over $1.27 \mu\text{m}$ ($50 \mu\text{m}$) Nickel



④ V = Straight

⑤ Insulation: 2 = PBT UL 94V-0, Color Black

A = Nylon 6T UL 94V-0, Color Black

⑥ Pin Length Option code:

See Table PDF. File No. CH3401T

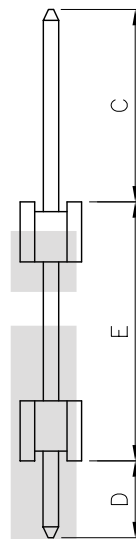

Recommended P.C. Board Layout


RoHS Compliant



A = $2.54 \times \text{No. of Spaces}$

B = A + 2.36

* Available in 2 through 40 circuits

④	Sun	10/6-08'	ECN08478/ECR08118-1		DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") SINGLE ROW DUAL BODY BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation
③	Bill	4/23/07'	ECN07148/ECR07059-0	DRAWN BY:	Sun	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	LYNN	12/13-04	ECN04465/ECR04109-0	ENGINEER:	Eisley	.X ± 0.30/.012 .X* ± 1'	FINISH:	
①	SUN	4/09/04'	ECN04144	CHECKED BY:	Alex	.XX ± 0.20/.008 .X* ±	DRAWING NO. CH3401SO PART NO. CH34***V***	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	.XXX ± 0.10/.004 .XX* ±	SCALE 3 / 1 SHEET 1 OF 1	