


Material:
 △ * Insulation: Nylon 6T UL 94V-0
 * Contact: Brass

Ordering Code:

CH74 ** 2 V 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of contacts
- ③ Plating option:
 1= 3.05μm(120μ") Min. Tin
 over 1.27μm(50μ") Nickel
 2= Gold flash plated over 1.27μm(50μ") Nickel
 3= 0.38μm(15μ") Gold plated
 over 1.27μm(50μ") Nickel
 4= 0.76μm(30μ") Gold plated
 over 1.27μm(50μ") Nickel
- ④ Tail style: V= Straight
- ⑤ Color: 1= Black
- ⑥ Option: 00= Standard

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
6	4.00(.157)	13.2(.520)	12.10(.476)	32	30.00(1.181)	39.2(1.543)	38.10(1.500)
8	6.00(.236)	15.2(.598)	14.10(.555)	34	32.00(1.260)	41.2(1.622)	40.10(1.579)
10	8.00(.315)	17.2(.677)	16.10(.634)	36	34.00(1.339)	43.2(1.700)	42.10(1.657)
12	10.00(.394)	19.2(.756)	18.10(.713)	40	38.00(1.496)	47.2(1.858)	46.10(1.815)
14	12.00(.472)	21.2(.835)	20.10(.791)	44	42.00(1.654)	51.2(2.016)	50.10(1.972)
16	14.00(.551)	23.2(.913)	22.10(.870)	50	48.00(1.890)	57.2(2.252)	56.10(2.209)
18	16.00(.630)	25.2(.992)	24.10(.949)	60	58.00(2.283)	67.2(2.646)	66.10(2.602)
20	18.00(.709)	27.2(1.071)	26.10(1.028)	64	62.00(2.441)	71.2(2.803)	70.10(2.760)
22	20.00(.787)	29.2(1.150)	28.10(1.106)	68	66.00(2.598)	75.2(2.961)	74.10(2.917)
24	22.00(.866)	31.2(1.228)	30.10(1.185)				
26	24.00(.945)	33.2(1.307)	32.10(1.264)				
28	26.00(1.023)	35.2(1.386)	34.10(1.343)				
30	28.00(1.102)	37.2(1.465)	36.10(1.421)				

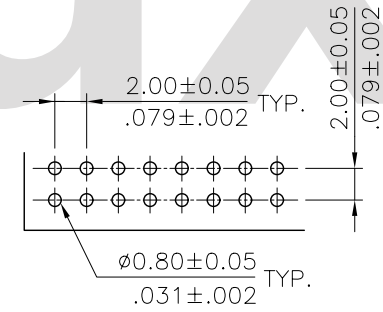

Recommended P.C. Board Layout

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") STRAIGHT DUAL ROW BORAD MOUNT PIN HEADER	瀚荃股份有限公司 CviLux Corporation
△3					DRAWN BY: Sandy	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
△2	Sandy	1/17/05'	ECN05015		ENGINEER: Eisley	.X ± 0.30/.012 X: ± 1'	FINISH:	DRAWING NO. CH7401SI PART NO. CH74***V100
△1	SUN	12/08/03'	ECN03446/ECRO3060-0		CHECKED BY: David	.XX ± 0.20/.008 X: ±	SCALE 2 / 1	SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	.XX ± 0.10/.004 .XX ±		

CVILUX.CORP
 2005.01.31
 ISSUED