


Material:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

* Shell: Steel, Tin plated as standard

Recommended P.C. Board Layout see drawing No. CD0506S*

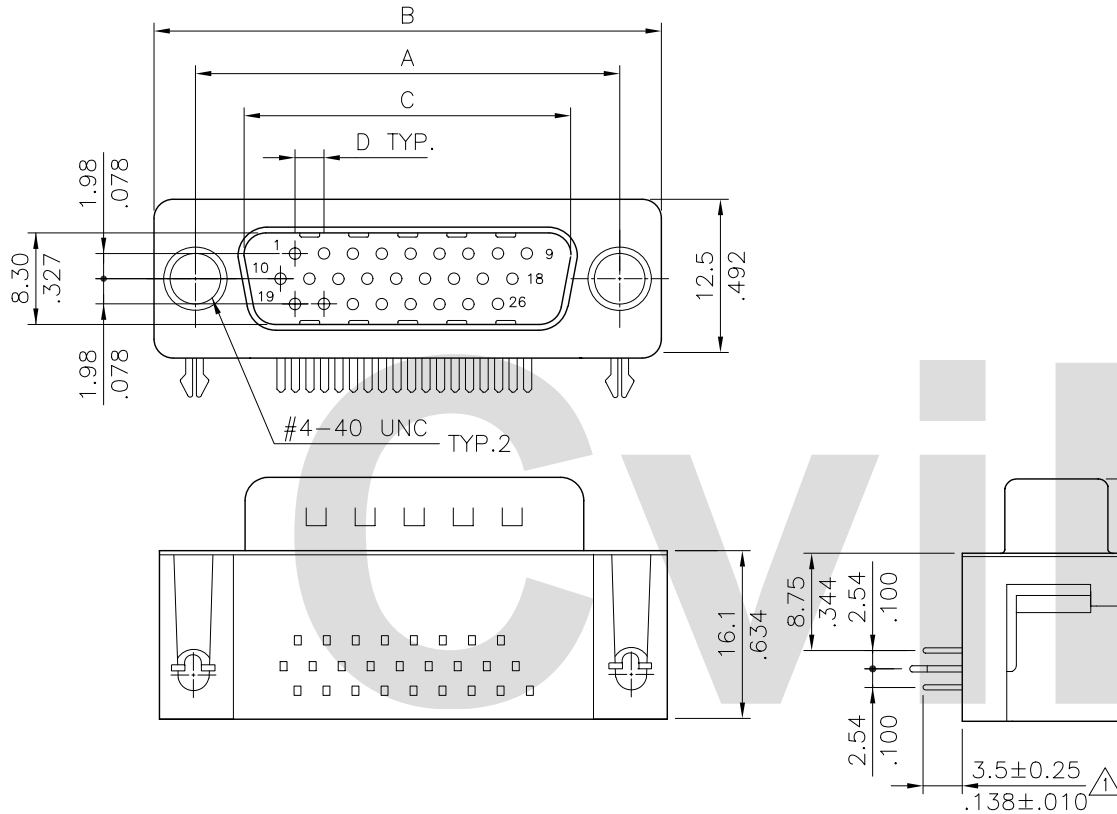

Circuits	Dimension			
	A	B	C	D
15	25.00(.984)	30.8(1.213)	16.92(.666)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	2.29(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	2.41(.095)

Ordering Code:

CD05 26 P 2 1 F0
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Plug(Male)
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over Nickel
B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C= Selective 0.76um(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black; 0= White; 7= Blue
- ⑥ Other Option:
F0= Riveted ground hooks with #4-40 UNC open (Standard)
G0= Riveted ground hooks pre-loaded #4-40 UNC Hex screw
I0= Riveted ground tabs thread #4-40 UNC open and ground tabs with ø3.2mm holes
J0= Assembly ground hooks by #4-40 UNC Hex screw

Mounting Style

Code	F0	Code	G0	Code	I0	Code	J0
			DIM. L= 4.8mm				DIM. L= 4.8mm

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB PCB MOUNT MALE CONNECTOR	 瀚荃股份有限公司 CviLux Corporation
③			2006.08.24		DRAWN BY: Jim	8/24 06'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
②			ISSUED		ENGINEER: Easley	8/24 06'	.X ± 0.30/.012 X' ± 1'	MATERIAL:	
①	Jim	8/23/06'	ECR06066-0/ECN06264		CHECKED BY: David	8/24 06'	.XX ± 0.20/.010 .X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	8/24 06'	.XXX ± 0.10/.004 .XX' ±		DRAWING NO. CD0504SG	PART NO. CD05**P*1**
		SCALE	2 / 1	SHEET 1 OF 1					