


Material:
 * Insulation: Glass filled polyester UL 94V-0
 * Contact: Phosphor Bronze

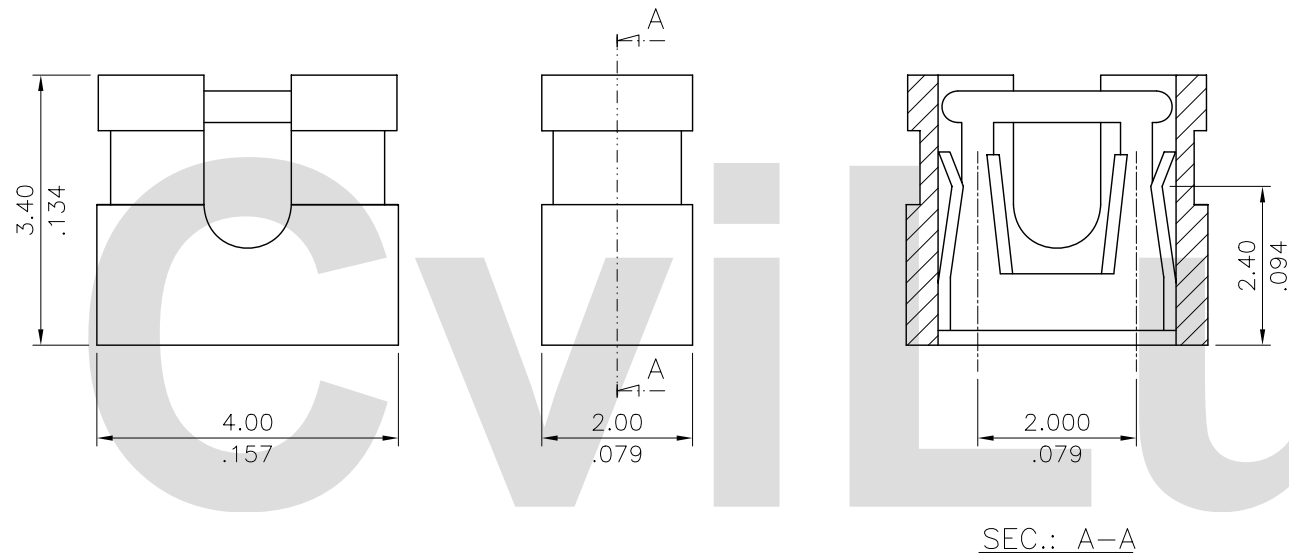

△ Ordering Code:

CS01 34 2 B 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Isulation high:
- ③ Plating option:
2= Gold flash plated over
1.27 μ m(50 μ "") Nickel
- ④ Contact type:
B= Open end
- ⑤ Color code:
1= Black ,3= Red ,7= Blue
- ⑥ Option:
00= Standard

RoHS Compliant

△4						DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") LOW PROFILE OPEN TOP SHUNT	 瀚荃股份有限公司 CviLux Corporation	
△3			DRAWN BY: Sandy		5/5-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:		
△2	Sandy	5/5-09'	ECN09224		ENGINEER: Eisley	5/6-09'	.X ± 0.30 / .012	.X' ± 1"		
△1	SUN	9/30/05	ECR05067-0/ECN05275		CHECKED BY: David	5/5-09'	.XX ± 0.20 / .008	.X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	5/6-09'	.XXX ± 0.10 / .004	.XX' ±	FINISH:	DRAWING NO. CS0101SC	PART NO. CS01342B*00
									SCALE 10 / 1	SHEET 1 OF 1