


Material:

- \* Insulation: Glass filled polyester UL 94V-0
- \* Contact: Phosphor Bronze



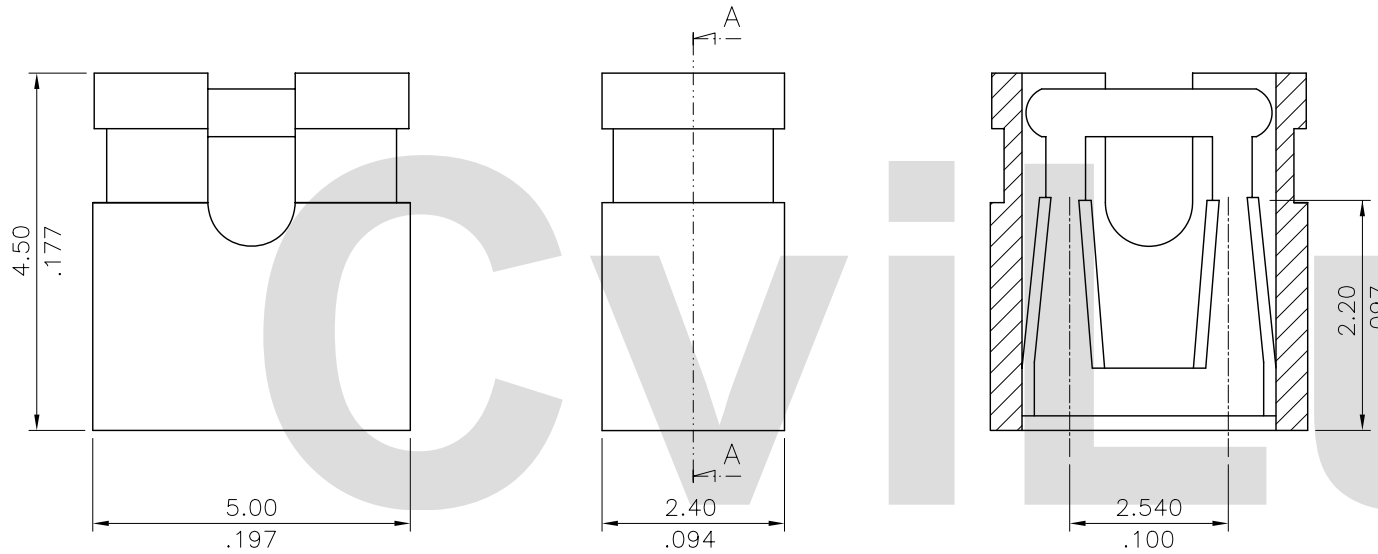

Ordering Code:

CS01 45 2 B \* 00  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Isulation high:
- ③ Plating option:  
 2= Gold flash plated over  
 1.27 $\mu$ m(50 $\mu$ "") Nickel
- ④ Contact type:  
 B= Oper end
- ⑤ Color code:  
 1= Black ,3= Red ,7= Blue
- ⑥ Option:  
 00= Standard

SEC.: A-A

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") LOW PROFILE OPEN TOP SHUNT	 瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Sandy 5/5-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sandy	5/5-09'	ECN09224		ENGINEER: Eisley 5/6-09'	.X $\pm$ 0.30 / .012    .X' $\pm$ 1"	MATERIAL:	DRAWING NO. CS0102SC    PART NO. CS01452B*00
①	SUN	9/30/05	ECR05067-0/ECN05275		CHECKED BY: David 5/5-09'	.XX $\pm$ 0.20 / .008    .X' $\pm$	.XXX $\pm$ 0.10 / .004    .XX' $\pm$	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex 5/6-09'				