


Material:
 * Insulation: Glass filled polyester UL 94V-0
 * Contact: Phosphor Bronze

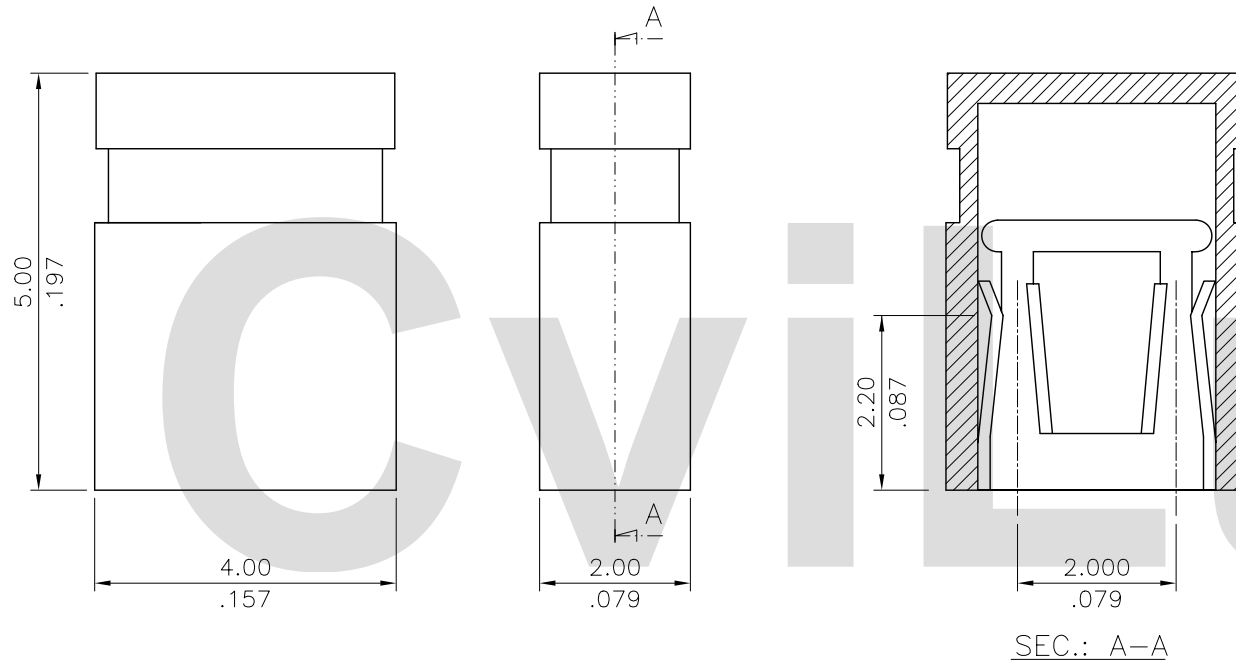

Ordering Code:

CS01 50 2 A 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Isulation high:
- ③ Plating option:
2= Gold flash plated over 1.27μm(50μ”) Nickel
- ④ Contact type:
A= Closed ead
- ⑤ Color code:
1= Black ,3= Red ,7= Blue
- ⑥ Option:
00= Standard

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") LOW PROFILE CLOSED TOP SHUNT	瀚荃股份有限公司 CviLux Corporation	
③			DRAWN BY: Sandy		5/5-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	DRAWING NO. CS0103SC		PART NO. CS01502A*00
②	Sandy	5/5-09'	ECN09224		ENGINEER: Eisley	5/6-09'	.X ± 0.30 / .012 X' ± 1"	FINISH:	SCALE 10 / 1	SHEET 1 OF 1
①	SUN	9/30/05	ECR05067-0/ECN05275		CHECKED BY: David	5/5-09'	.XX ± 0.20 / .008 .X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	5/6-09'	.XXX ± 0.10 / .004 .XX' ±				