


Material:

- * Insulation: Glass filled polyester UL 94V-0
- * Contact: Phosphor Bronze

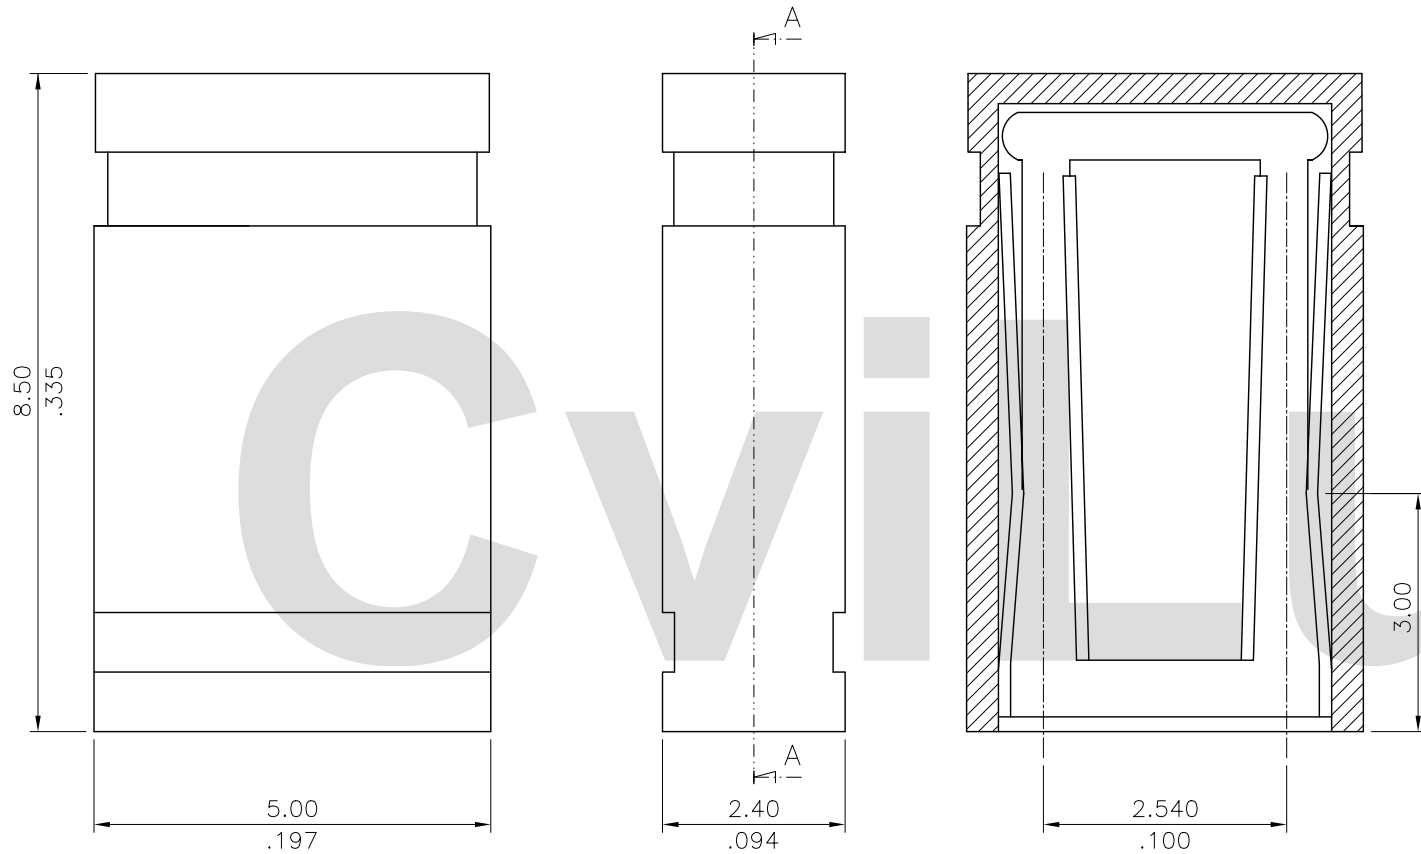

Ordering Code:

CS01 85 2 A 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Isulation high:
- ③ Plating option:
2= Gold flash plated over 1.27μm(50μ") Nickel
- ④ Contact type:
A= Closed ead
- ⑤ Color code:
1= Black ,3= Red ,7= Blue
- ⑥ Option:
00= Standard

SEC.: A-A

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") CLOSED TOP SHUNT	 瀚荃股份有限公司 CviLux Corporation	
③			DRAWN BY: Sandy		5/5-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:		
②	Sandy	5/5-09'	ECN09224		ENGINEER: Eisley	5/6-09'	.X ± 0.30 / .012	X' ± 1"		MATERIAL:
①	SUN	9/30-05'	ECR05067-0/ECN05275		CHECKED BY: David	5/5-09'	.XX ± 0.20 / .008	.X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	5/6-09'	.XXX ± 0.10 / .004	.XX' ±		DRAWING NO. CS0107SC	PART NO. CS01852A*00
									SCALE 10 / 1	SHEET 1 OF 1