

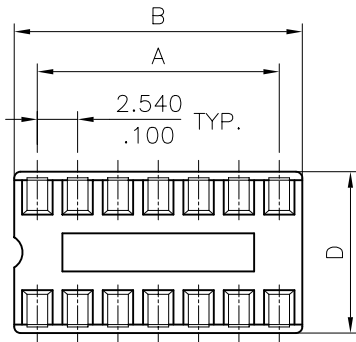


Materials:


- \* Insulator: Glass filled Polyester UL 94V-0, Color Black
- \* Contact: Phosphor Bronze




Typical 6,8,14,16,18,20,22,24,28 Circuits

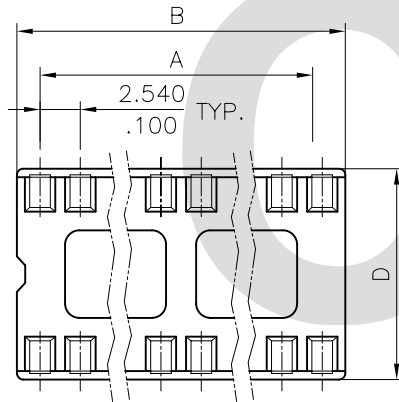

Typical 24,28,32,40,42,48 Circuits

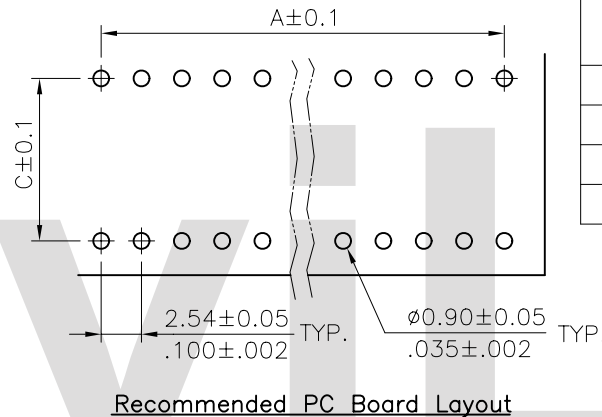

Recommended PC Board Layout




Circuits	CviLux P/N	Dimension			
		A	B	C	D
6	CS050611000	5.08(.200)	7.62(.300)	7.62(.300)	9.9(.390)
8	CS050811000	7.62(.300)	10.16(.400)	7.62(.300)	9.9(.390)
14	CS051411000	15.24(.600)	17.78(.700)	7.62(.300)	9.9(.390)
16	CS051611000	17.78(.700)	20.32(.800)	7.62(.300)	9.9(.390)
18	CS051811000	20.32(.800)	22.86(.900)	7.62(.300)	9.9(.390)
20	CS052011000	22.86(.900)	25.40(1.000)	7.62(.300)	9.9(.390)
22	CS052211000	25.40(1.000)	27.94(1.100)	7.62(.300)	9.9(.390)
24	CS052411000	27.94(1.100)	30.48(1.200)	7.62(.300)	9.9(.390)
	CS052411A00			15.24(.600)	17.5(.689)
28	CS052811000	33.02(1.300)	35.56(1.400)	7.62(.300)	9.9(.390)
	CS052811A00			15.24(.600)	17.5(.689)
32	CS053211A00	38.10(1.500)	40.64(1.600)	15.24(.600)	17.5(.689)
40	CS054011A00	48.26(1.900)	50.80(2.000)	15.24(.600)	17.5(.689)
42	CS054211A00	50.80(2.000)	53.34(2.200)	15.24(.600)	17.5(.689)
48	CS054811A00	58.42(2.300)	60.96(2.400)	15.24(.600)	17.5(.689)

Ordering Code

CS05 \*\* 1 1 \* 00  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Plating code:  
1 = 2.54µm(100µ") Min. Tin  
over 1.27µm(50µ") Nickel
- ④ Color: 1 = Black
- ⑤ Option:  
Please check details in Table
- ⑥ Other option: 00 = Standard

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.54MM(.100")	 瀚荃股份有限公司 CviLux Corporation
3					DRAWN BY: Sun	9/27-06'	DUAL IN LINE IC SOCKET	
2					ENGINEER: Eisley	9/27-06'	MATERIAL:	DRAWING NO. CS0503SB PART NO. CS05**11*00
1	Sun	9/26-06'	ECN06350		CHECKED BY: David	9/27-06'	FINISH:	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	9/27-06'		SCALE 2 / 1 SHEET 1 OF 1

CVILUX CORP.  
 2006.10.11  
 ISSUED