Material:
* Insulation: Glass filled polyester UL 94V-0
* Contact: Phosphor Bronze

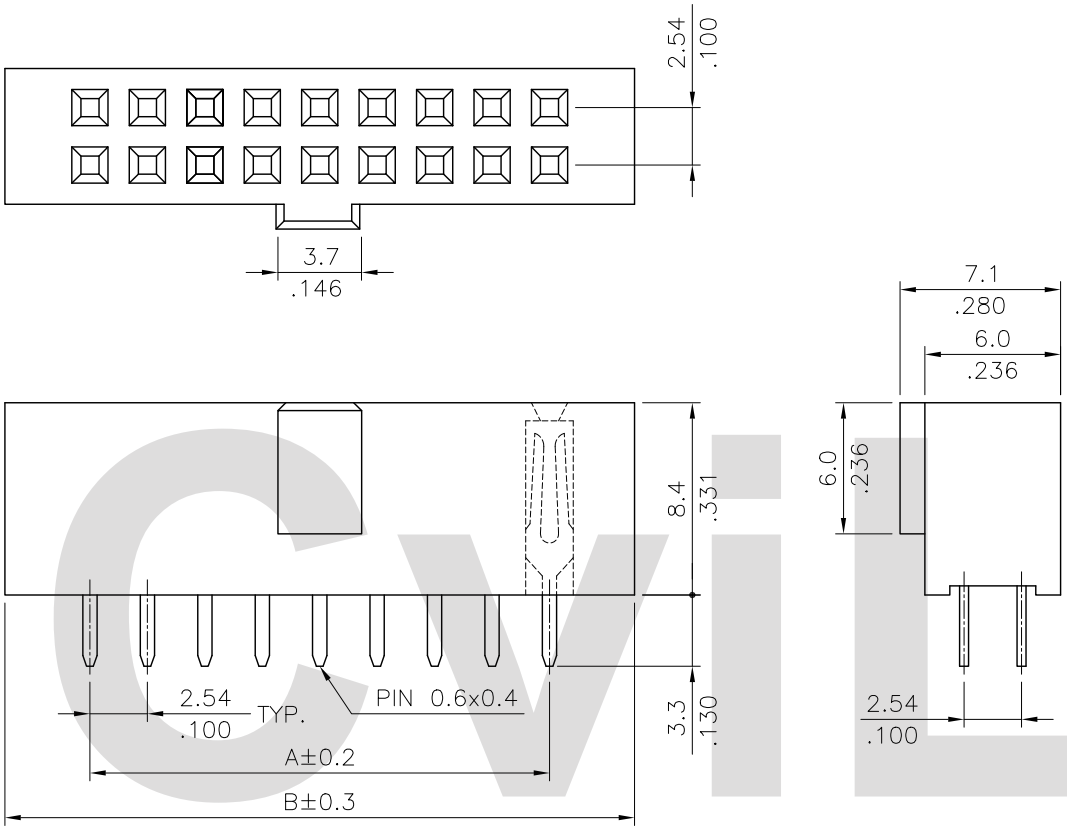

Ordering Code:

CB94	**	2	V	1	00
①	②	③	④	⑤	⑥

① Series No.
② NO. of Circuits:
③ Plating code:
2= Gold flash plated over 1.27μm(50μ") Nickel
④ Tail Style: V= Straight
⑤ Color: 1= Black
⑥ Other options: 00= Standard

A = 2.54 * No. of Spaces
B = A + 7.34
* Available circuits: 6,8,10,12,14,16,20,24,26, 30,34,40 and 50

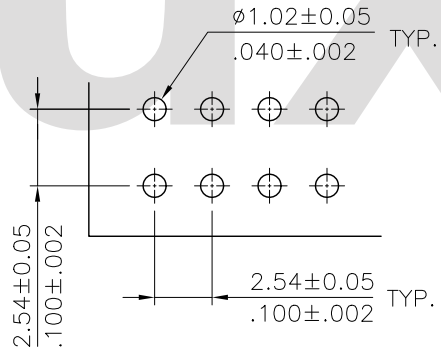

Recommended P.C. Board Layout

RoHS Compliant

CVILUX CORP
2010.08.10
ISSUED

SYM	NAME	DATE	REVISIONS			DATE
4						
3				DRAWN BY:	Sun	8/02-10'
2	Sun	8/02-10'	ECR10108-0/ECN10270	ENGINEER:	Eisley	8/03-10'
1	Sun	7/07-05'	ECR05063-0/ECN05236	CHECKED BY:	David	8/03-10'
				APPROVED BY:	David	8/03-10'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30 / .012	X.' ± 1'
.XX ± 0.20 / .008	.X" ±
.XXX ± 0.10 / .004	.XX" ±

TITLE: 2.54MM(.100")
DUAL ROW BOARD MOUNT CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CB9401SD	PART NO.	CB94**2V100
SCALE	3 / 1	SHEET 1 OF 1	