



Ordering Code

CB50 ** 2 0 0 T 0
 ① ② ③ ④ ⑤ ⑥ ⑦

- Series No.
- Contacts: 50~60
- Plating option :
 - 3.05 μ m(120 μ "") Min. Tin plated over 1.27 μ m(50 μ "") Nickel
 - 0.05 μ m(2 μ "") Min. Gold flash over 1.27 μ m(50 μ "") Nickel
 - 0.38 μ m(15 μ "") Min. Gold plated over 1.27 μ m(50 μ "") Nickel
 - 0.76 μ m(30 μ "") Min. Gold plated over 1.27 μ m(50 μ "") Nickel
- 0= Without Peg , P= With Peg
- 0= Without Pick & Place Pad,P= With Pick & Place Pad
- Packing: R=Tape & Reel ,T= Tube Packaged
- Other Option: 0= LCP(Standard), M= Nylon 9T


Δ * The one with both Peg and Pad is with Tape & Reel packing only.

For Bottom entry mounting style

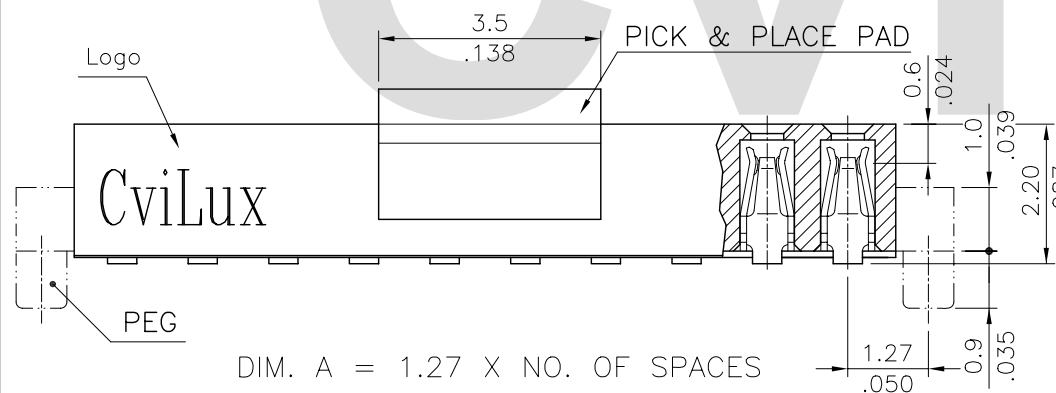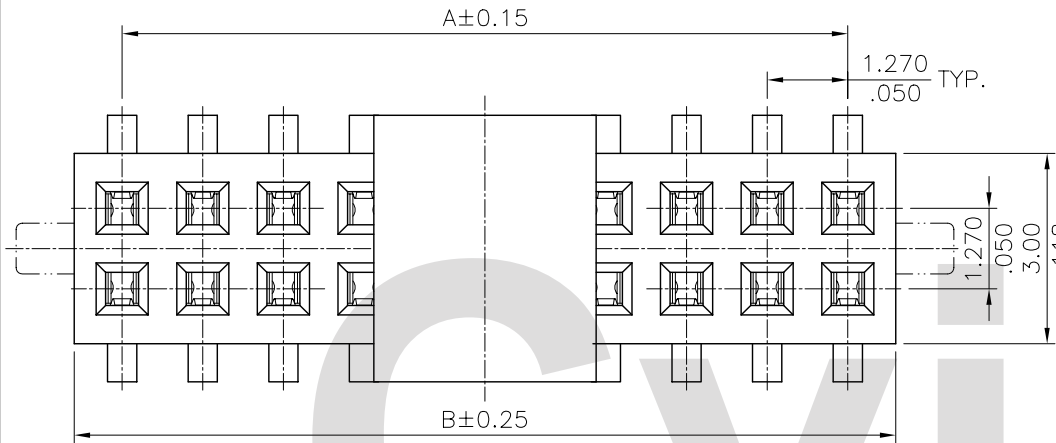


DIM. A = 1.27 X NO. OF SPACES
 DIM. B = DIM. A + 1.67

Δ * AVAILABLE IN 50 THROUGH 60 CIRCUITS

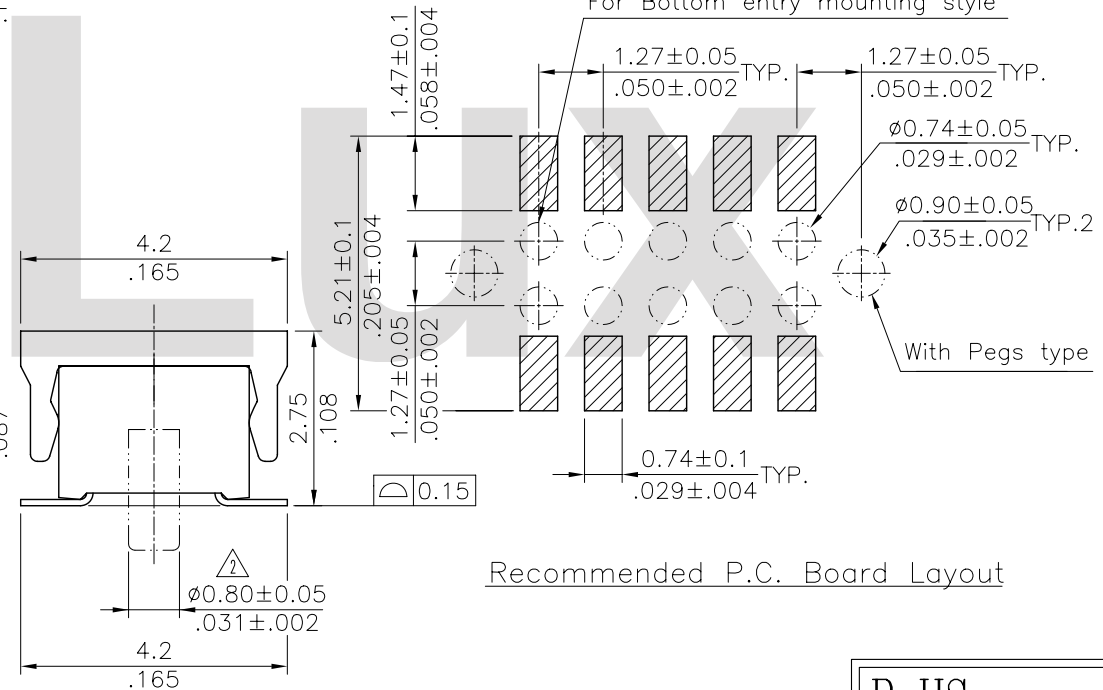

Recommended P.C. Board Layout

RoHS Compliant

④	Sun	11/9-09'	ECR06081-0/ECN06356		DATE	UNIT: mm / inch	TITLE: LOW PROFILE 1.27*1.27MM SMT TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation
③	Sandy	5/28-07'	ECR07023-1/ECN07188	DRAWN BY: Sun	11/13-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sandy	1/10-07'	ECN07019	ENGINEER: Easley	11/16-09'	.X ± 0.25/.010 X: ± 1'	FINISH:	
①	Sun	9/25-06'	ECR06081-0/ECN06356	CHECKED BY: Easley	11/16-09'	.XX ± 0.15/.006 X: ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/16-09'	.XXX ± 0.08/.003 X: ±		
DRAWING NO. CB5010SE PART NO. CB50***** SCALE 8 / 1 SHEET 1 OF 1								

2009.12.01
ISSUED